



High-tech production diet mixers

Kongskilde is one of Europe's leading specialists in the manufacture of complete diet mixers

The range of Trailed diet mixers is specially developed for the challenges that future milk producers are facing.

The machines are designed and developed in Denmark and tested on farms right across Europe and produced in our modern production facilities.

Through the whole manufacturing process large tools are used to fix the parts during welding in order to ensure consistency and high quality. The choice of high-strength steel results in a feeder which is exceptionally hard-wearing. This ensures highest quality and makes the Kongskilde Feeders the best diet mixers on the market.

The range of diet feeders consists of 21 "basic families". The complete Feeder VM range can be seen in the table below.

Trailed diet mixers with 1 auger

Cross conveyor



Trailed diet mixers with 2 augers

Cross conveyor



The diet mixers VM range

Volume	Number of dairy cows per load (8000 kg ECM/ cow/year)	1 auger					2 augers					
		VM-1 S	VM-1	VM-1 B	VM-1 B X	VM-1 B M	VM-2 S	VM-2 SB	VM-2 SB X	VM-2 SB M	VM-2	VM-2 B
6,5 m³	35-45	VM 6.5-1 S									VM 20-2	VM 20-2 B
8 m³	45-55	VM-8-1 S									VM 22-2	VM 22-2 B
10 m ³	55-70	VM 10-1 S	VM 10-1	VM 10-1 B	VM 10-1 B X	VM 10-1 B M						
12 m ³	67-85		VM 12-1	VM 12-1 B	VM 12-1 B X	VM 12-1 B M	VM 12-2 S				VM 27-2	VM 27-2 B
14 m³	80-100		VM 14-1	VM 14-1 B	VM 14-1 B X	VM 14-1 B M	VM 14-2 S	VM 14-2 SB	VM 14-2 SB X	VM 14-2 SB M		
16 m³	93-120						VM 16-2 S	VM 16-2 SB	VM 16-2 SB X	VM 16-2 SB M	VM 30-2	VM 30-2 B
18 m³	105-135						VM 18-2 S	VM 18-2 SB	VM 18-2 SB X	VM 18-2 SB M		
20/21 m ³	115-150						VM 20-2 S	VM 20-2 SB	VM 20-2 SB X	VM 20-2 SB M		

S: Compact / narrow

M: Multi (Cross conveyor combined with straw bedding equipment)

B: Cross conveyor

X: The X-range - the fleXible 4-in-one cross conveyer belt solution (flat - side shift - elevator right and left)

Trailed diet mixers with 3 augers


Discharge doors



Unique mixing auger





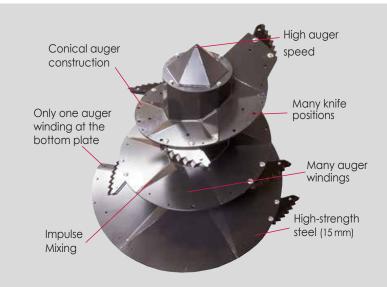

	Number of dairy cows per	2 augers		3 augers								
Volume	load (8000 kg ECM/ cow/year)	VM-2 B X	VM-2 B M	VM-3 S	VM-3 SB	VM-3 SB X	VM-3 SB M	VM-3	VM-3 B	VM-3 B X	VM-3 B M	
20/21 m ³	115-150	VM 20-2 B X	VM 20-2 B M	VM 21-3 S	VM 21-3 SB	VM 21-3 SB X	VM 21-3 SB M					
22 m ³	125-165	VM 22-2 B X	VM 22-2 B M									
24 m³	135-185			VM 24-3 S	VM 24-3 SB	VM 24-3 SB X	VM 24-3 SB M					
26/27 m ³	155-195	VM 27-2 B X	VM 27-2 B M	VM 26-3 S	VM 26-3 SB	VM 26-3 SB X	VM 26-3 SB M					
28 m³	160-210			VM 28-3 S	VM 28-3 SB	VM 28-3 SB X	VM 28-3 SB M					
29/30 m ³	175-220	VM 30-2 B X	VM 30-2 B M					VM 29-3	VM 29-3 B	VM 29-3 B X	VM 29-3 B M	
32 m³	190-240							VM 32-3	VM 32-3 B	VM 32-3 B X	VM 32-3 B M	
38 m³	220-280							VM 38-3	VM 38-3 B	VM 38-3 B X	VM 38-3 B M	
45 m ³	260-350							VM 45-3	VM 45-3 B	VM 45-3 B X	VM 45-3 B M	

SEKO INDUSTRIES SRL Via Gorizia, 90 - 35010 Curtarolo (PD) IT Tel. +39 049 9699888 - Fax +39 049 9620403 info@sekoindustries.com - www.sekoindustries.com



